Outline of the joint Swedish and Danish fisheries research/fishing industry survey for cod in the Kattegat

December 2016



National Institute of Aquatic Resources Technical University of Denmark Charlottenlund Slot, DK-2920 Charlottenlund Denmark Marie Storr-Paulsen Peter Vingaard Fiskerivärket

Box 423, 401 26 , Göteborg Sweden Katja Ringdahl Johan Løvgren

Introduction

Since 2003 the cod fishery in Kattegat has been restricted by steadily decreasing quotas due to low abundance of cod estimated from the cod assessment. ICES consider, however, the cod assessment in Kattegat uncertain due to the catch data quality and the analytic assessment has not been accepted by ACFM in recent years. The assessment has shown a discrepancy between the estimated fishing mortality and the reported landings and ICES assumed that the majority of the unallocated mortality was caused by discard, but other factors such as migration, non reported landings and reallocation of catches also could be part of the problem. Furthermore, the surveys conducted at present in the Kattegat area are not very suited for estimation of cod abundance mainly due to the low coverage and sampling intensity. The abundance estimate in the areas is hence rather uncertain and only shows trends in stock development, and the assessment of the cod stock would, without doubt, benefit significantly from a survey directly aimed at cod. The 5 August 2006 a tender was submitted by Swedish Board of Fisheries, Institute of Marine Research (IMR-SE) in response to the open call for tenders, Reference No FISH/2006/15 Studies and Pilot projects for carrying out the common fisheries policy, Lot No 3: "Evaluation of the pilot effort regime in Kattegat" from Directorate-General for Fisheries and Maritime Affairs.

Both Swedish and Danish scientists and the fishermen's organisations aggress that the poor survey quality hampers the assessment of the cod stock in Kattegat and an expert group consisting of people from the fisherman's organisations and scientists has designed an improved survey. The initiative has been taken by the LOT 3 project group and was originally a strictly Swedish project. However, the involvement of Denmark has been considered as an improvement of the project and the survey has been designed in all details in agreement between fishers and scientists from both countries. The survey has been conducted since 2008 with a gap in 2012 and only Swedish vessels participating in 2013. The survey strata has been moderated slightly since 2013 to take into account the closed area very a separate strata has been placed.

The goal

The goal of the Kattegat cod survey is to estimate the abundance, biomass and distribution of cod and to establish a fisheries independent time series of catch and effort series. Furthermore, a recruitment index will be established. The results should be used, together with commercial catch and effort data to strengthen the scientific advice on the cod stock in Kattegat. The survey will also monitor the amount and distribution of cod within the proposed "closed area" in order to analyse the effect of the closure.

Restrictions

The 4 commercial trawlers participating in the survey conduct the survey without any restrictions in the vessels quota, days at sea regulation and with dispensation from all by-catch regulations.

Survey design

Survey area

The survey area is restricted to the Kattegat area covering from Skagen, to the Tistlarna lighthouse and in south by an south-eastwards line between Ellekilde Hage and Lerbjerg and south-westwards by a line between Gniben og Hassensør on Djursland. Further, the area is restricted by the 20 m depth contour line and the area is split in areas "North" and "South" (Fig. 1). However, in two fjords Laholmsbugten and Skældervigen fishing at stations shallower than 20 meter will take place and 1 or two stations will be placed in a small area in The Sound "Kilen".

Survey method and stratification

The survey is designed as a random stratified bottom trawl survey. The survey area is since 2013 stratified in four strata: a stratum with high cod density, a stratum with medium density and a stratum with low cod density based on information from the fishers a forth strata has been designate to make sure not stations are placed within the closed area. Each stratum is further subdivided in 5*5 nm squares. Most stations according to the area are allocated to the high density stratum. In the forthcoming years stations will be allocated to the different strata in order to minimize the variance of the estimation of the cod biomass. The survey design allows a post-stratification of the survey area if necessary without loosing comparability with previous surveys and hence to take changes in the main focus area into account if the stock distribution is changing between years or the stock is increasing or decreasing.

Station (tow) location

The survey is planed with in average 3.3 trawl hauls per day in 6 days for each of the 4 vessels i.e in total 80 trawl hauls. The hauls are allocated randomly to the 5*5 nm squares and each vessel is allocated 20 different squares. In the high and medium density strata several vessels are allowed to fish in the same square. In the low density stratum only one haul is allowed in each square. Furthermore the low density area is divided in a Southern and Northern area.

Numbers of stations by vessel, stratum and area

Ship	High density	Medium density	Low density	Low density	Closed	Total
			(South)	(North)	area	
Den ₁	12	10	14		4	40
Swe ₁	6	5	7		2	20
Swe ₂	6	5		7	2	20

Target species

The survey is directed to demersale species in Kattegat, but designed for cod. The catch of all species is, however, recorded and the survey results are also made available for the assessment of sole, plaice and Norwegian lobster.

Survey period

The survey will take place during the last week of November/ 1 week of December 2015. There is planned with 6 fishing days for each vessel. The survey period can, however, be extended in case

of bad weather or technical problems. Trawling is restricted to 15 min. before sunrise to 15 min. after sun set.

Vessels and Fishing gear

Vessels

The survey is conducted by four commercial chartered trawlers, two covering the northern and two the southern area, respectively. Two vessels are Swedish and the other two are Danish. The vessels have been appointed due to the similarity in engine power, length and applicability for scientific investigations.

DK-Vessel 1

Danish participant Havfisken

Engine (KW):

Tonnage (BRT): 48 Length (m): 17,5

Door type/size

Owner DTU Aqua

SW-Vessel 1

Swedish participant	1 (VG 37 – Ganler)
Engine (KW):	373 kW
Tonnage (BRT):	74
Length (m):	17.94

Door type/size

Owner Kjell Svahn

Comment [MARST1]: New ship?

SW-Vessel 2

Swedish participant 2 (VG 104 – Tärnan)
Engine (KW): 272 kW
Tonnage (BRT): 68
Length (m): 15.73

Door type/size

Owner Börje Nilsson

Gear

The trawl is a commercial bottom trawl provided by the LOT 3 project.

Trawl (see annex): A Swedish TV-trawl 112 ft 24-464

13 pieces of 8" balls and 16 pieces of 6" balls.

4 thumps rubber discs at 10 cm

Mesh size in cod end: 70 mm stretch mesh.

Otter boards: 64"-66" "Thyborøn"

Warp: 35 mm.

Mellem liner der benyttes må i 2015 varierer i længden mellem 54 og 154 meter. "Grimdelen" på 27 meter skal bi- beholdes hvilket gives en total længde på mellem 81 og 181 meter. Det er bare vigtigt at notere hvor lang en line der er benyttet.

The trawls are checked continuously during the survey.

Fishing operation

Within each square the skipper decides on the best way to fish at the location (e.g. exact position, tow direction). Such an approach has been used successfully in the north-eastern North Sea and the Skagerrak in comparable projects (Wieland et al. 2008).

Maximum 5 min of the total trawling time should be outside the allocated square. If the 5 minutes are exceeded the haul should be terminated. Trawl procedure:

Towing time: 60 min (towing time down to 20 min is accepted).

Towing speed: Between 2.7 kn. and 3.4 over the seabed, but speed should not vary within a station. Hauls start: when the trawl is considered going stable on the bottom, roughly 5-7 min after wires are connected.

Haul end: when hauling back starts.

Trawled distance: is estimated from the plotter.

Sampling of catch

There will be two technicians/scientists from DTU-Aqua (Danish vessels) or from SLU – Aqua (Swedish vessels), who will be responsible for processing the catch, on board each vessel. However, the crew should help the scientific staff whenever possible.

The catch will be processed in accordance with BITS standard operating procedures for trawl surveys. After each haul the catch is sorted by species and weighed to nearest 0.1 kg and the number of specimens recorded. All fish species are measured as total length (TL) to 1.0 cm below. Norwegian lobster is measured in mm.

Cod otoliths (2 per cm group) are sampled for age determination by each vessel in each of the two areas.

Additional scientific samples can be collected if requested (genetic, tagging, frozen samples, etc.).

Screening of data

All trawl data (position, wingspread, towing speed etc.) and catch and length frequency data on sole, cod, plaice and Norwegian lobster are screened for unrealistic figures before further estimations.

Data

Data are stored in a standard data base and can will, if the survey continues, be uploaded to the ICES DATRAS system.

Estimation of stock indices

CPUE

CPUE is estimated as mean catch (kg or number) per hour (cod also number by age per hour).

Biomass and abundance

Hence no stations are deeper than 100 m, biomass and abundance is estimated for depths between 20 and 100 m. The survey area is stratified in density strata and the area between 20 and 100 m has been estimated. The total survey area is 19037.6 km² (Table 1).

Biomass and abundance estimates is based on the randomly selected stations and obtained by applying the swept area method:

Swept area= (estimated trawling speed *1.852)* wing spread * trawling time/60

using the recorded towing speed, wing spread and trawling time and taking the catchability coefficient as 1.0 and the stratum area as weighting factor (Cohran, 1977).

All catches are standardized to 1 km² swept prior to further calculations.

Reporting

The survey results are reported to WGBAFS as a working document. The document includes information about aerial distribution, CPUE, biomass, abundance and length frequencies on cod, sole, plaice and Norwegian lobster together with age distribution of cod.

References

Cochran, W.G. 1977. Sampling Techniques. Third edition. Wiley & Sons.

ICES. 2005. Report of the Workshop on Survey Design and Data Analysis (WKSAD). ICES CM 2005/ B:07, 174 pp.

Wieland, K. and Storr-Paulsen, M. 2006. Effect of tow duration on catch and size composition of Northern shrimp (*Pandalus borealis*) and Greenland halibut (*Reinhardtius hippoglossoides*) in the West Greenland Bottom trawl survey. Fisheries Research 78: 276-285.

Wieland, K., E.M. Fenger Pedersen, H.J. Olesen & J.E. Beyer (2008): Survey results from a Danish collaborative biologist-fishermen project on spatially-explicit management methods (REX) for North Sea cod. Working document, ICES WGNSSK, 7.-13. May 2008.

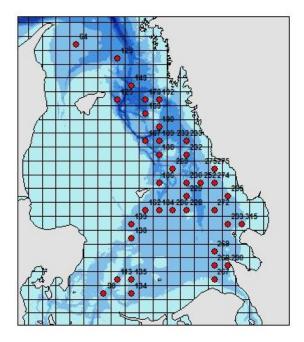


Fig. 1. Distribution of hauls by type and ICES squares. The red dots indicate stations from the Danish vessel "Havfisken".

Ruta			DK Nord
64	57.61608	10.90656	1
126	57.27578	11.34978	1
129		11.36580	1
149	57.35592	11.50886	1
167			1
293	56.49957	12.50551	1
315	56.49524	12.65563	1
184	56.60161	11.76040	1
186	56.76780	11.77259	1
188	56.93398	11.78491	1
189	57.01707	11.79113	1
206	56.59817	11.91103	1
230	56.76070	12.07515	1
232	56.92684	12.08881	1
233	57.00990	12.09570	1
272	56.58677	12.36272	1
274	56.75287	12.37756	1
275	56.83591	12.38504	1
268	56.25456	12.33350	1
269	56.33762	12.34075	1
Ruta			DK Syd
90	56.11470	11.12955	1
113	56.19518	11.28327	1
113 134		11.28327 11.42712	1
	56.10921		
134	56.10921	11.42712	1
134 135	56.10921 56.19234	11.42712 11.43237	1
134 135 138	56.10921 56.19234 56.44170	11.42712 11.43237 11.44828	1 1 1
134 135 138 139	56.10921 56.19234 56.44170 56.52482 56.60486	11.42712 11.43237 11.44828 11.45364	1 1 1 1
134 135 138 139 162	56.10921 56.19234 56.44170 56.52482 56.60486	11.42712 11.43237 11.44828 11.45364 11.60973	1 1 1 1 1
134 135 138 139 162 169	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966	11.42712 11.43237 11.44828 11.45364 11.60973 11.65063	1 1 1 1 1
134 135 138 139 162 169 170	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966	11.42712 11.43237 11.44828 11.45364 11.60973 11.65063 11.65660	1 1 1 1 1 1 1
134 135 138 139 162 169 170 190 192 228	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966 57.10016 57.26633 56.59455	11.42712 11.43237 11.44828 11.45364 11.60973 11.65063 11.65660 11.79737 11.80997 12.06163	1 1 1 1 1 1 1 1 1 1
134 135 138 139 162 169 170 190 192 228 209	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966 57.10016 57.26633 56.59455 56.84742	11.42712 11.43237 11.44828 11.45364 11.65063 11.65660 11.79737 11.80997 12.06163 11.93037	1 1 1 1 1 1 1 1 1
134 135 138 139 162 169 170 190 228 209 229	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966 57.10016 57.26633 56.59455 56.84742 56.67763	11.42712 11.43237 11.44828 11.45364 11.60973 11.65063 11.65660 11.79737 11.80997 12.06163 11.93037 12.06837	1 1 1 1 1 1 1 1 1 1
134 135 138 139 162 169 170 190 228 209 229 233	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966 57.10016 57.26633 56.59455 56.84742 56.67763 57.00990	11.42712 11.43237 11.44828 11.45364 11.65063 11.65660 11.79737 11.80997 12.06163 11.93037	1 1 1 1 1 1 1 1 1 1 1
134 135 138 139 162 169 170 190 228 209 229 233 252	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966 57.10016 57.26633 56.59455 56.84742 56.67763 57.00990 56.75687	11.42712 11.43237 11.44828 11.45364 11.60973 11.65063 11.79737 11.80997 12.06163 11.93037 12.06837 12.09570 12.22637	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
134 135 138 139 162 169 170 190 192 228 209 229 233 252 275	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966 57.10016 57.26633 56.59455 56.84742 56.67763 57.00990 56.75687 56.83591	11.42712 11.43237 11.44828 11.45364 11.60973 11.65063 11.65660 11.79737 12.06163 11.93037 12.06837 12.09570 12.22637 12.38504	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
134 135 138 162 169 170 190 192 228 209 229 233 252 275 295	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966 57.10016 57.26633 56.59455 56.84742 56.67763 57.00990 56.75687 56.83591 56.66564	11.42712 11.43237 11.44828 11.45364 11.60973 11.65063 11.65660 11.79737 12.06163 11.93037 12.06837 12.09570 12.22637 12.38504 12.52094	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
134 135 138 139 162 169 170 190 192 228 209 229 233 252 275	56.10921 56.19234 56.44170 56.52482 56.60486 57.18657 57.26966 57.10016 57.26633 56.59455 56.84742 56.67763 57.00990 56.75687 56.83591	11.42712 11.43237 11.44828 11.45364 11.60973 11.65063 11.65660 11.79737 12.06163 11.93037 12.06837 12.09570 12.22637 12.38504	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

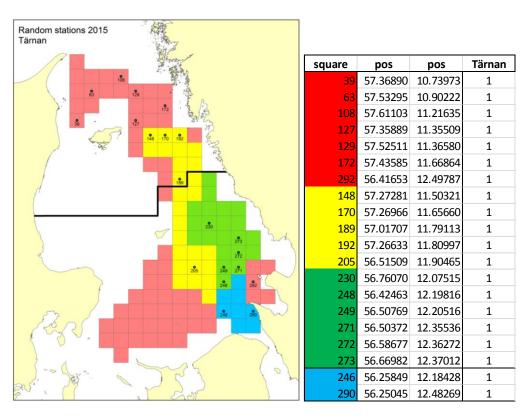


Fig. 3. Distribution of hauls by type and ICES squares. The black dots indicate stations from the northern Swedish vessel Tärnan.

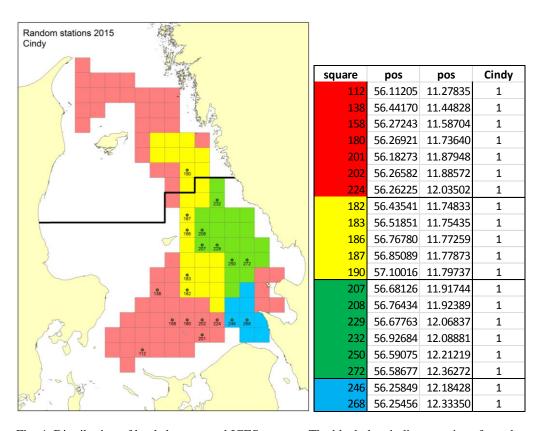


Fig. 4. Distribution of hauls by type and ICES squares. The black dots indicate stations from the southern Swedish vessel.

Table 1. Area (km²) 20-120 m depth by depth area.

High density	Medium density	Low	Closed area	All
		density		
21 squares	26 squares	65 squares	8 squares	120 squares
1800.8 km ²	2229.5 km ²	5573.8 km ²	686 km ²	10290 km ²


Square	pos	pos	Tärnan	Cindy	Stjerne	Anni
39	57.36890	10.73973	1			
40	57.45204	10.74367				
41	57.53518	10.74764				
42	57.61832	10.75163			1	
43	57.70146	10.75565			1	
62	57.44981	10.89790			1	
63	57.53295	10.90222	1			
64	57.61608	10.90656				
85	57.53052	11.05677				
86	57.61365	11.06147				
107	57.52791	11.21130				
108	57.61103	11.21635	1			
125	57.19266	11.34450			1	
126	57.27578	11.34978			1	
127	57.35889	11.35509	1			
128	57.44200	11.36043				
129	57.52511	11.36580	1			
146	57.10660	11.49198				
149	57.35592	11.50886			1	
150	57.43902	11.51455				
151	57.52212	11.52027				
166	56.93727	11.63291				
167	57.02037	11.63879				
168	57.10347	11.64469				
171	57.35276	11.66261				
172	57.43585	11.66864	1			
173	57.51894	11.67471				
214	57.26280	11.96330				
291	56.33349	12.49026				
292	56.41653	12.49787	1			
293	56.49957	12.50551				
313	56.32919	12.63972				
315	56.49524	12.65563			1	
68	56.11718	10.98072				1
69	56.20033	10.98501				
89	56.03156	11.12497				1
90	56.11470	11.12955				
91	56.19785	11.13415				
92	56.28098	11.13878		_		
112	56.11205	11.27835		1		
113	56.19518	11.28327				
114	56.27831	11.28823				1
115	56.36144	11.29321				1
134	56.10921	11.42712				1
135	56.19234	11.43237 11.43765				
136 137	56.27546 56.35858	11.43765				
137	56.44170	11.44293		1		
139	56.52482	11.44626		1		
156	56.10620	11.57587				
157	56.18931	11.58144				
157	56.27243	11.58704		1		
159	56.35554	11.59266				1
160	56.43865	11.59832				-
161	56.52176	11.60401				1
162	56.60486	11.60973				-
178	56.10301	11.72459				
179	56.18611	11.73047				
180	56.26921	11.73640		1		
181	56.35231	11.74235				
201	56.18273	11.87948		1		
202	56.26582	11.88572		1		
203	56.34891	11.89200				
223	56.17917	12.02845				
224	56.26225	12.03502		1		

Table 2. All selected stations for the 2015 cod survey

Square	pos	pos	Tärnan	Cindy	Stjerne	Anni
147	57.18971	11.49758			1	
148	57.27281	11.50321	1			
169	57.18657	11.65063				
170	57.26966	11.65660	1			
182	56.43541	11.74833		1		
183	56.51851	11.75435		1		
184	56.60161	11.76040				
185	56.68470	11.76648				1
186	56.76780	11.77259		1		
187	56.85089	11.77873		1		
188	56.93398	11.78491				
189	57.01707	11.79113	1			
190	57.10016	11.79737		1		
191	57.18324	11.80365				1
192	57.26633	11.80997	1			
204	56.43200	11.89831				
205	56.51509	11.90465	1			
206	56.59817	11.91103				1
210	56.93050	11.93688			1	
211	57.01358	11.94343			1	
212	57.09665	11.95002			-	1
213	57.17973	11.95664				1
225	56.34533	12.04162				
226	56.42840	12.04825			1	
227	56.51148	12.04823			1	
228	56.59455	12.06163			1	
207	56.68126	11.91744		1	1	1
207	56.76434	11.91744		1		
208	56.84742	11.92369		1		
209	56.67763	12.06837		1	1	
230	56.76070		1	1	1	1
230	56.84377	12.07515				1
		12.08196		1		1
232	56.92684	12.08881		1		
233	57.00990	12.09570	1			
248	56.42463	12.19816	1		4	
249	56.50769	12.20516	1	1	1	
250	56.59075	12.21219		1	1	
251	56.67381	12.21926			1	
252	56.75687	12.22637				
253	56.83993	12.23352	1			1
271	56.50372	12.35536	1			1
272	56.58677	12.36272	1	1		
273	56.66982	12.37012	1		1	
274	56.75287	12.37756			1	
275	56.83591	12.38504				
294	56.58261	12.51320				
295	56.66564	12.52094			1	1
246	56.25849	12.18428	1	1		
247	56.34156	12.19120			_	
267	56.17150	12.32630			1	
268	56.25456	12.33350		1		
269	56.33762	12.34075				1
270	56.42067	12.34803				
289	56.16740	12.47516			1	
290	56.25045	12.48269	1			1

Station	allocatio	n							
		center_x	Station		Center_y	center_x	Station	Center_y	center_x
	_,	10.52753	Otation	51	56.53524	10.85190	101	57.02918	11.18159
		10.52755		52	56.61839	10.85597	101	57.11230	11.18647
		10.53412		53	56.70154	10.86006	102	57.11230	11.10047
				54			103		11.19136
		10.53744 10.54078		55	56.78469 56.86783	10.86418	104	57.27855 57.36167	11.19632
						10.86831			
		10.54413		56	56.95098	10.87247	106	57.44479	11.20628
	56.45620			57	57.03412	10.87665	107	57.52791	11.21130
		10.55090		58	57.11726	10.88086	108	57.61103	11.21635 11.22142
	56.62253			59	57.20040	10.88508	109	57.69414	
		10.55773		60 61	57.28354	10.88933	110		11.26857
		10.56118		62	57.36668	10.89360	111	56.02891	11.27345
		10.56464			57.44981	10.89790	112	56.11205	11.27835
		10.56813		63	57.53295	10.90222	113	56.19518	11.28327
		10.57163		64	57.61608	10.90656	114	56.27831	11.28823
		10.57515		65	57.69921	10.91093	115	56.36144	11.29321
		10.57869		66	55.95088	10.97222	116	56.44457	11.29821
		10.58225		67	56.03403	10.97646	117	56.52770	11.30325
		10.58583		68	56.11718	10.98072	118	56.61082	11.30831
		10.58943		69	56.20033	10.98501	119	56.69395	11.31339
		10.59304		70	56.28348	10.98931	120	56.77707	11.31851
		10.59668		71	56.36662	10.99365	121	56.86019	11.32365
		10.60034		72	56.44977	10.99800	122	56.94331	11.32882
		10.67578		73	56.53291	11.00237	123		11.33402
		10.67939		74	56.61605	11.00678	124	57.10955	11.33924
	56.12160			75	56.69919	11.01120	125	57.19266	11.34450
		10.68665		76	56.78233	11.01565	126	57.27578	11.34978
	56.28792			77	56.86547	11.02012	127	57.35889	11.35509
		10.69399		78	56.94861	11.02461	128	57.44200	11.36043
		10.69769		79	57.03174	11.02913	129	57.52511	11.36580
	56.53740			80	57.11488	11.03368	130	57.60822	11.37120
		10.70515		81	57.19801	11.03825	131	57.69132	11.37663
	56.70371			82	57.28114	11.04284	132	55.94296	11.41671
		10.71269		83	57.36427	11.04746	133	56.02609	11.42190
		10.71649		84	57.44740	11.05210	134	56.10921	11.42712
	56.95316			85	57.53052	11.05677	135	56.19234	11.43237
		10.72415		86	57.61365	11.06147	136	56.27546	11.43765
	57.11946			87	57.69677	11.06619	137	56.35858	11.44295
	57.20261	10.73190		88	55.94842	11.12041	138	56.44170	11.44828
		10.73580		89	56.03156	11.12497	139	56.52482	11.45364
39	57.36890	10.73973		90	56.11470	11.12955	140	56.60793	11.45903
		10.74367		91	56.19785	11.13415	141	56.69105	11.46445
		10.74764		92	56.28098	11.13878	142	56.77416	11.46990
42	57.61832	10.75163		93	56.36412	11.14344	143	56.85727	11.47537
43	57.70146	10.75565		94	56.44726	11.14812	144	56.94038	11.48088
44	55.95316	10.82401		95	56.53039	11.15282	145	57.02349	11.48642
45	56.03632	10.82793		96	56.61353	11.15755	146	57.10660	11.49198
46	56.11948	10.83188		97	56.69666	11.16231	147	57.18971	11.49758
47	56.20263	10.83584		98	56.77979	11.16709	148	57.27281	11.50321
48	56.28579	10.83982		99	56.86292	11.17190	149	57.35592	11.50886
49	56.36894	10.84383	•	100	56.94605	11.17673	150	57.43902	11.51455
50	56.45209	10.84786							

Station	Center v	center_x	Station	Center v	center_x	Station	Center v	center_x	Station	Center_y	center v
		11.52027	201			251				57.16382	
		11.52602		56.26582		251		12.21920		57.10382	
		11.53180	202	56.34891	11.89200	252		12.23352		57.32986	
		11.56482	203	56.43200	11.89831	253 254				57.41288	
		11.57033	204	56.51509	11.90465	25 4 255				57.41200	
		11.57587	206	56.59817		256				57.57891	
		11.58144	207	56.68126	11.91744	257		12.26250		57.66192	
		11.58704 11.59266	208 209	56.76434	11.92389 11.93037	258 259		12.26984 12.27723		55.91402 55.99706	
		11.59266	209	56.93050		259 260				56.08009	
	56.52176		210	57.01358	11.93688 11.94343	260		12.29212	310		12.62399
			211			261					
	56.60486 56.68797		212	57.09665 57.17973	11.95002 11.95664	262	57.67041	12.29962 12.30717		56.24616 56.32919	
		11.62126	213		11.96330	263 264		12.30717		56.41221	
	56.85417		214	57.34587	11.96330	264 265	56.00538			56.49524	
	56.93727			57.42894	11.97672	266		12.31199		56.57826	
	57.02037		217	57.51201	11.98349	267	56.17150	12.31913	317		12.60303
	57.10347		217	57.59508	11.90349	267	56.25456	12.32030		56.74430	
		11.65063	219	57.67814		269		12.33330		56.82732	
		11.65660	219	55.92991	12.00897	270		12.34803		56.91034	
	57.35276		221	56.01300	12.00697	270		12.34603		56.99335	
	57.43585		221	56.09608	12.01543	271	56.58677			57.07636	
	57.51894		222	56.17917	12.02192	272	56.66982			57.07636	
	57.60203		223	56.26225	12.02643	273		12.37756		57.13937	
	57.68511		225	56.34533	12.03302	274	56.83591	12.37730	325		
		11.71290	226		12.04102	275				57.40839	
		11.71290	227	56.51148	12.04623	277	57.00200	12.39230	327		12.75475
	56.10301		228	56.59455	12.05492	278	57.00200		328		
		11.73047	229			279		12.40773		57.65740	
		11.73640	230	56.76070	12.00037	280	57.10007	12.41337	330		
	56.35231		231	56.84377		281		12.42300		55.99263	
		11.74233	232	56.92684	12.08180	282				56.07565	
	56.51851		233	57.00990	12.00001	283	57.50021	12.44637		56.15867	
		11.76040	234	57.09297	12.10263	284	57.58324	12.45423		56.24168	
	56.68470		235	57.17603	12.10203	285	57.66626	12.46212	335	56.32470	
	56.76780		236		12.11659	286	55.91826			56.40771	
		11.77873	237	57.34215	12.11003	287	56.00131	12.46022	337		12.80571
	56.93398		238	57.42521	12.13071	288	56.08436	12.46767	338		12.81405
		11.79113	239	57.50827	12.13782	289				56.65674	
	57.10016		240	57.59132	12.14498	290	56.25045		340		
	57.18324		241		12.15217	291		12.49026	341		12.83936
		11.80997	242	55.92621	12.15695	292	56.41653	12.49787		56.90575	
		11.81632	243	56.00928		293	56.49957	12.50551	343		12.85645
		11.82270	244	56.09235	12.17054	294	56.58261	12.51320		57.07175	
		11.82912	245	56.17542	12.17739	295	56.66564	12.52094	345		12.87374
		11.83557	246		12.18428	296	56.74868	12.52871		57.23774	
	57.68172		247	56.34156	12.19120	297	56.83171	12.53652		57.32073	
	55.93344		248	56.42463	12.19816	298	56.91474	12.54438	348		12.90001
		11.86709	249	56.50769	12.20516	299	56.99777	12.55228		57.48671	12.90887
		11.87327	250		12.21219	300	57.08079	12.56022		57.56969	12.91777
_00			_00			200				57.65268	
									501	00200	

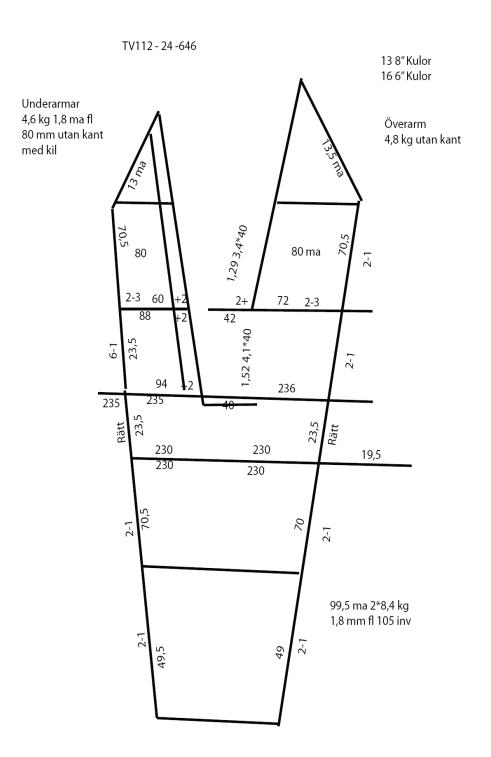

Tubel 11. To eksempler på hvordan afstanden mellem skovlene kan beregnes ud fra spilet i wirerne.

1. metode

 En pind, skruenøgle, kniv eller hvad man nu har for hånden sættes ind, hvor afstanden mellem wirerne lige svarer til længden af genstanden. Fra dette punkt finder man ud af, hvor mange gange dette mål kan ligge langs wiren op til det sted, hvor wirerne går sammen.

2) Afstanden mellem skovlene fås ved at dele wirelængden med »antallet af mål«. Eksempel: Fra det sted på wirerne, hvor spredningen er 1 skruenøgle, er der 5.5 skruenøgle op til hvor wirerne går sammen.

skruenøgle op til hvor wirerne går sammen. Wirelængde: 150 fv = 274 m. Afstand mellem skovle: 274:5,5 = 50 m.



Fig. 33: To metoder til beregning af spilet er her illustreret. Det letter udmålingen, hvis wirerne kan samles med et bændsel.

2. metode

1) Mål afstanden mellem wirerne 1 meter fra, hvor de går sammen.

2) Afstanden hér ganget med wirelængden giver afstanden mellem skovlene. Eksempel: Spredningen på 1 meter: 18 cm = 0,18 m

Wirelængde: 150 fv = 274 mAfstand mellem skovle: $0.18 \times 274 = 49 \text{ m}$